




PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

QTY. \_\_\_\_\_

#### DIMENSIONS

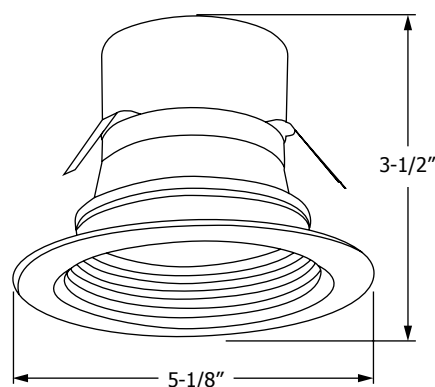

#### FEATURES

- ♦ Fits 4" Low Voltage Housings.
- ♦ Bi-Pin socket for MR16 retrofit.
- ♦ Baffle reduces stray light.
- ♦ Housing meets restricted air flow requirement (per ASTM E-283).
- ♦ CRI - 90
- ♦ 50,000 Hours

#### LISTINGS/QUALIFICATIONS

- ♦ CA Title 24 compliant.
- ♦ Meets ENERGY STAR requirements
- ♦ ETL listed for damp locations



#### 500 LUMEN PACKAGE

Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW
500	2700K	8W	550	68.75
	3000K	8W	550	68.75
	4000K	8W	550	68.75

#### ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **4LV-5-5L-30K-1-D3**

4LV	5	5L		1	D3
SERIES	FIXTURE DIAMETER	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING
<b>4LV</b>	<b>5</b> 5-1/8"	<b>5L</b> 550 lm	<b>27K</b> 2700K <b>30K</b> 3000K <b>40K</b> 4000K	<b>1</b> 120V	<b>D3</b> Dimmable 120V