

APPLIES TO MODELS: LA620-2, LA620-4

GENERAL SAFETY INFORMATION

- ♦ To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- ♦ Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- ♦ Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- ♦ To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- ♦ Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- ♦ **DO NOT INSTALL DAMAGED PRODUCT!**
- ♦ This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- ♦ Suitable for Dry or Damp locations

WARNING: RISK OF ELECTRICAL SHOCK

- ♦ Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- ♦ Turn off the power when you perform any maintenance.
- ♦ Verify that supply voltage is correct by comparing it with the luminaire label information.
- ♦ Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- ♦ All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- ♦ Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- ♦ Avoid direct eye exposure to the light source while it is on.
- ♦ Account for small parts and destroy packing material, as these may be hazardous to children.

CAUTION: RISK OF FIRE


- ♦ Keep combustible and other materials that can burn away from luminaire and lamp/lens.
- ♦ MIN 90°C SUPPLY CONDUCTORS.

SAVE THESE INSTRUCTIONS

Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer. Each luminaire is to be used with inside driver kit. Wiring to be performed by qualified electrician only.


MOUNTING INSTALLATION

APPLIES TO MODELS
LA620-2, LA620-4

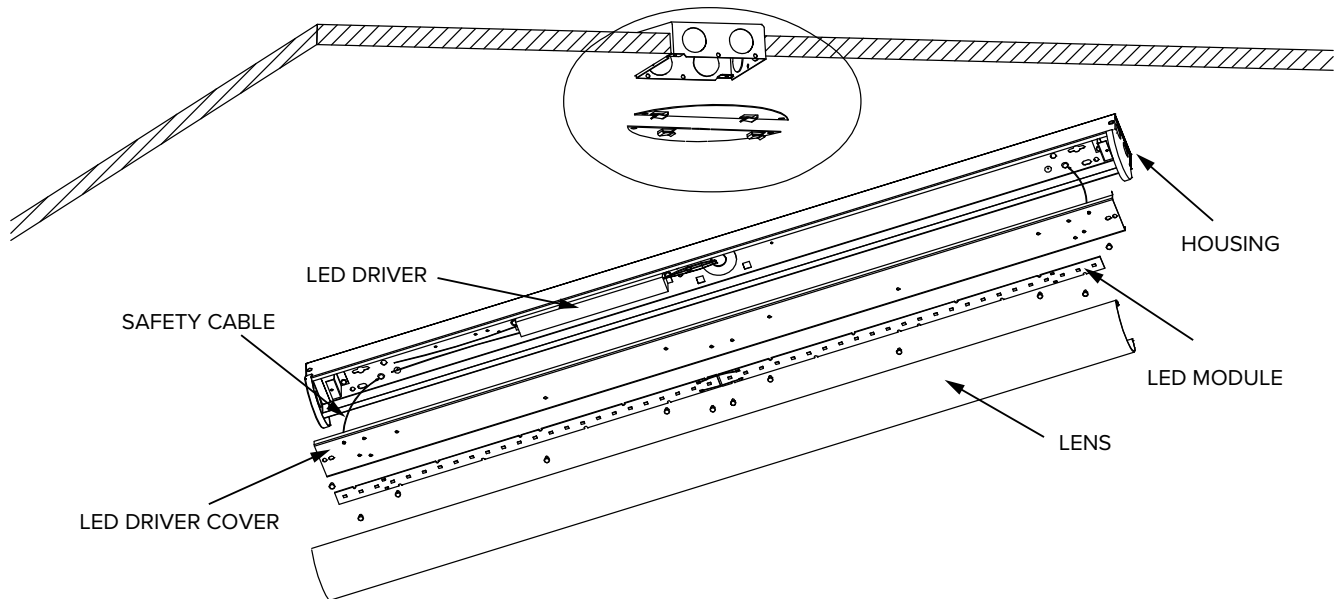


MOUNTING OPTIONS

FIGURE 1

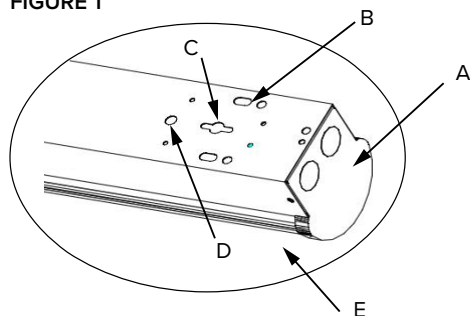

- A: END CAP
- B: SLOT FOR V HOOK
(USED WITH CHAIN MOUNTING)
- C: SLOT FOR SURFACE MOUNTING
- D: SLOT FOR T-BAR CLIP MOUNTING
- E: WIRING KNOCKOUTS

CONCEALED OUTLET BOX

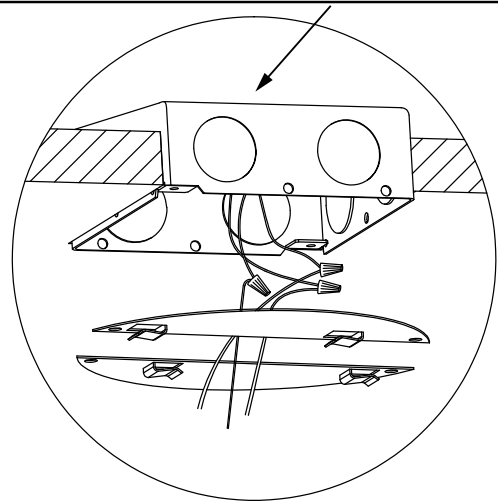

B: Chain Mounting with V Hook

Attach V-Hooks provided by others to the slots in each end of the luminaire housing. Attach chain provided by others to the V-hooks and mounting surface.

C: Surface Mounting

Secure luminaire base to mounting surface by inserting suitable fasteners(provided by others) into the key hole slots on the top side of luminaire housing,and attaching the fasteners to a mounting surface.

D: T-Bar Clip Mounting Hole

Attach T-Bar clips (provided by others) to the designated slots on the luminaire housing as show in Figure 1. Position the luminaire into the T-Bar ceiling grid and secure the luminaire to the grid.