



OVERVIEW

- ♦ The LA615 is an innovative, architectural luminaire providing direct and indirect light distribution. With its transparent acrylic lens, the LA615 gives the perfect illusion to any modern application of light floating in mid-air.

FEATURES

- ♦ Available in 1'x4' / 8"x4' / 8"x8' sizes.
- ♦ 55% direct light distribution.
- ♦ 45% indirect light distribution.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 105.
- ♦ 120-277V (50/60Hz)
- ♦ 0-10V Dimming

HOUSING

- ♦ Constructed from extruded aluminum material.
- ♦ Completed with a white coating finish.

LENS

- ♦ The clear acrylic plastic lens produces maximum illumination.

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ♦ Lobbies
- ♦ Conference Rooms
- ♦ Showrooms
- ♦ Reception Areas
- ♦ Offices
- ♦ Retail Spaces

INSTALLATIONS

- ♦ Designed for pendant mount with adjustable aircraft cable.
- ♦ Cable suspends 48" from ceiling. Other lengths available.
- ♦ Available as individual units or in continuous run applications supporting up to;
 - 1'x4' - 8 panels in 120V and 16 panels in 277V
 - 8"x4' - 9 panels in 120V and 18 panels in 230V
 - 8"x8' - 4 panels in 120V and 8 panels in 230V

LED

- ♦ Custom designed LED system with unique optics ensures perfectly even illumination.
- ♦ Dimming down to 10% on 0-10V dimming controls is standard.

WARRANTY

- ♦ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

LISTINGS/QUALIFICATIONS

- ♦ ETL C/US
- ♦ Damp Location
- ♦ DLC Listed

DLC LISTED BY MFR: OKT



ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **LA615-14-60L-35K-U-D2**

LA615				U	D2
SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING
LA615	14 1'x4'	1'x4'	35K 3500K	U 120-277V	D2 0-10V Dimming to 10%*
	84 8"x4'	60L 6000	40K 4000K		
	88 8"x8'	8"x4'	50K 5000K		
		42L 4200			
		8"x8'			
		84L 8400			

Dimmer Compatibility

Brand	Series	Model
LUTRON	DIVA	DVTV
LUTRON	NOVA	NTSTV-DV
LEVITON	ILLUMATECH	IP710-DL

*Compatible with 0-10V dimmers.

1'X4' LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
6000	3500K	55W	5906	108	✓
	4000K	55W	5966	109	✓
	5000K	55W	6025	110	✓

8"X4' LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
4200	3500K	40W	4200	105	✓
	4000K	40W	4200	105	✓
	5000K	40W	4200	105	✓


8"X8' LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
8400	3500K	80W	8400	105	✓
	4000K	80W	8400	105	✓
	5000K	80W	8400	105	✓

PHOTOMETRICS

Photometric reports are available at www.ullighting.net

DIMENSIONS

BACK VIEW

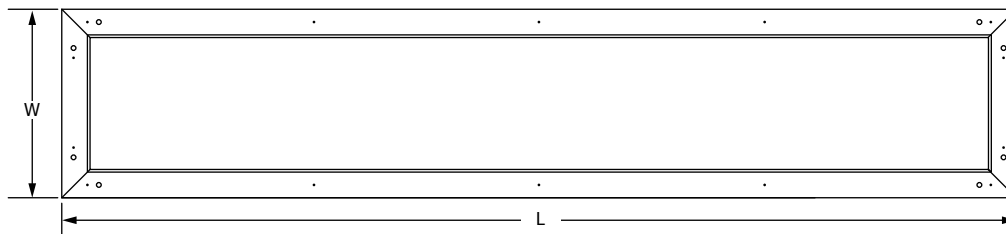

FIXTURE SIZE			
Nominal Size	Length (L)	Width (W)	Height (H)
1'X4'	47-1/4 in.	11-7/8 in.	1-1/8 in.
8"X4'	47-1/4 in.	7-7/8 in.	15/16 in.
8"X8'	94-1/2 in.	7-7/8 in.	15/16 in.

SIDE VIEW

