


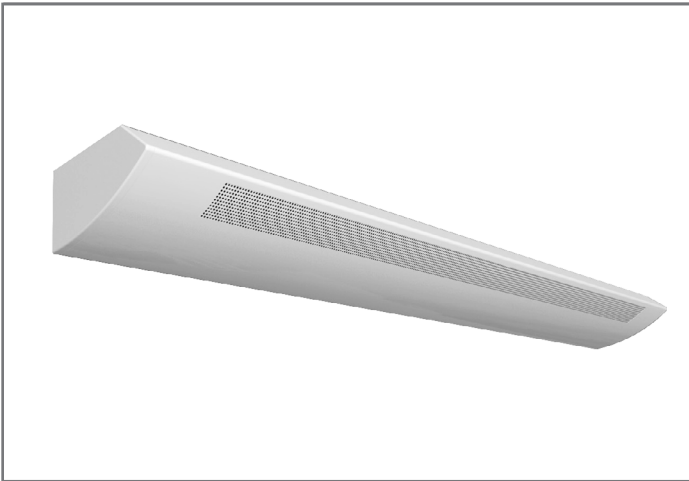

OVERVIEW

- ♦ The LA621 is a wall mount luminaire ideal for applications where indirect light distribution is necessary.
- ♦ The perforated housing produces 5% direct light distribution, while the open top produces 95% indirect light distribution

FEATURES

- ♦ Available in 4ft. nominal length.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 100.
- ♦ Class P Universal driver, 120-277V (50/60Hz)
- ♦ 0-10V Dimming.

HOUSING

- ♦ Constructed from 20 gauge roll formed steel body.

LENS

- ♦ Completed with enhanced anodized aluminum with 95% reflectivity.

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ♦ Retail Spaces
- ♦ Offices
- ♦ Lobbies
- ♦ Corridors

INSTALLATIONS

- ♦ Designed for surface mount on walls.
- ♦ For individual or continuous run applications.

LED

- ♦ Linear arrayed LED modules produce a perfect combination of diffuse and effective illumination.
- ♦ Each board contains several precisely placed mid-power, high efficacy LEDs in a layout that replaces the need for supplemental heat sinking.
- ♦ The LED boards maximize optical efficiency by producing evenly diffused light.
- ♦ Dimming down to 1% on 0-10V dimming controls is standard.

WARRANTY

- ♦ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

LISTINGS/QUALIFICATIONS

- ♦ ETL C/US
- ♦ Proudly Made in America



ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **LA621-4-47L-40K-U-D1**

LA621	4			U	D1	
SERIES	FIXTURE LENGTH	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	OPTIONS
LA621	4 4FT.	4FT.	30K 3000K 35K 3500K 40K 4000K 50K 5000K	U 120-277V	D1 0-10V Dimming to 1%*	Emergency
		34L 3400 47L 4700 60L 6000 64L 6400 XXX XXXX Custom Lumen Package Contact Factory.				E5 Emergency Battery Back-Up, 500 Lumens E7 Emergency Battery Back-Up, 700 Lumens E10 Emergency Battery Back-Up, 1000 Lumens E13 Emergency Battery Back-Up, 1300 Lumens

*Compatible with 0-10V dimmers.


Also available in 2ft. and 8ft. configurations. Consult factory for more information.

PHOTOMETRICS

Photometric reports are available at www.ullighting.net

DIMENSIONS

END VIEW



FIXTURE SIZE			
Nominal Size	Length (L)	Width (W)	Height (H)
4FT.	49-1/4	5-1/32	2-11/16

BACK VIEW

4 FOOT

