

OVERVIEW

 The LA623 is a wall mount luminaire ideal for applications where indirect light distribution is necessary.

FEATURES

- Available in 4ft. nominal length.
- CRI greater than 80.
- Rated Life [L70] 50,000 Hours.
- Fixture lumens per watt ratios [LpW] Greater than 100.
- Class P Universal driver, 120-277V (50/60Hz)
- 0-10V Dimming.

HOUSING

Constructed from 20 gauge roll formed steel body.

LENS

 Completed with enhanced anodized aluminum with 95% reflectivity.

PROJECT					
TYPE					
QTY.					

APPLICATIONS

- Retail Spaces
- Lobbies

Offices

Corridors

INSTALLATIONS

- · Designed for surface mount on walls.
- For individual or continuous run applications.

LED

- Linear arrayed LED modules produce a perfect combination of diffuse and effective illumination.
- Each board contains several precisely placed mid-power, high efficacy LEDs in a layout that replaces the need for supplemental heat sinking.
- The LED boards maximize optical efficiency by producing evenly diffused light.
- Dimming down to 1% on 0-10V dimming controls is standard.

WARRANTY

• 5 year limited warranty is standard.

Exclusions may apply. Contact factory for terms and conditions.

LISTINGS/QUALIFICATIONS

- ETL C/US
- Proudly Made in America








ORDERING GUIDE Fill in the boxes below with the corresponding **bold** options.

Example: LA623-4-47L-40K-U-D1

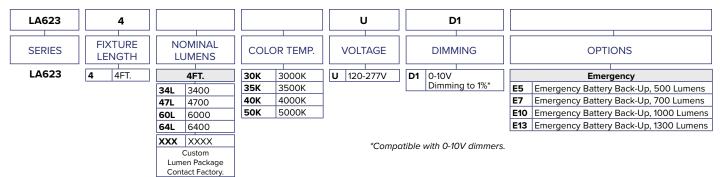


Also available in 2ft. and 8ft. configurations. Consult factory for more information.

PHOTOMETRICS

Photometric reports are available at www.ullighting.net

DIMENSIONS



	FIXTU	RE SIZE	
Nominal Size	Length (L)	Width (W)	Height (H)
4FT.	49-1/4	5-1/32	2-11/16

BACK VIEW

4 FOOT

