



FEATURES

- ◆ Low profile design.
- ◆ Easy to install, saving labor and extra housing costs.
- ◆ Spring clips hold fixture firmly to ceiling.
- ◆ IC Rated & Damp location rated.
- ◆ Edge Lit LED technology.
- ◆ Remote J-box with low voltage cable provides flexibility in mounting.
- ◆ Dimmable with leading edge incandescent style or LED dimmers.

SPECS

- ◆ 120VAC 60 HZ.
- ◆ 4" 9W - 0.09 Amps | 6" 12W - 0.12 Amps.
- ◆ Power factor > 0.9; THD < 15%.
- ◆ 90 CRI.
- ◆ 4°F to 104°F ambient operation.
- ◆ Steel housing box with Class II dimmable LED driver.
- ◆ 12" low voltage connection cable between box and fixture.
- ◆ 120° Beam angle.

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ◆ Low profile design facilitates mounting in confined ceiling areas or soffits.
- ◆ New construction or remodel applications.

INSTALLATIONS

- ◆ Does not require a separate housing, recess mount directly into ceiling. Simply wire and mount J-box, connect low voltage cable to fixture then secure into ceiling with spring clips.

LISTINGS/QUALIFICATIONS

- ◆ ETL C/US
- ◆ Damp Location
- ◆ IC Rated
- ◆ Energy Star



4" LUMEN PACKAGE			
Nominal Lumens	Color Temp.	Power (W)	LpW
550	3000K	9W	91.6
	4000K	9W	

6" LUMEN PACKAGE			
Nominal Lumens	Color Temp.	Power (W)	LpW
700	3000K	12W	58.3
	4000K	12W	

ORDERING GUIDE



Fill in the boxes below with the corresponding **bold** options.

Example: **LMP-6R-7L-40K-1-D3**



SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING
LMP	4SQ 4" Square 4R 4" Round 6SQ 6" Square 6R 6" Round	4" 5L 550 6" 7L 700	30K 3000K 40K 4000K	1 120V	D3 Dimmable

DIMENSIONS

ROUND 4" / 6"

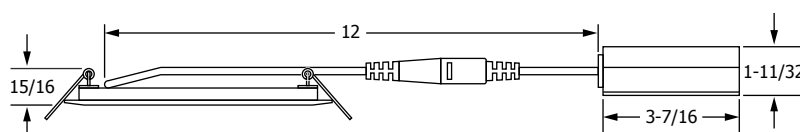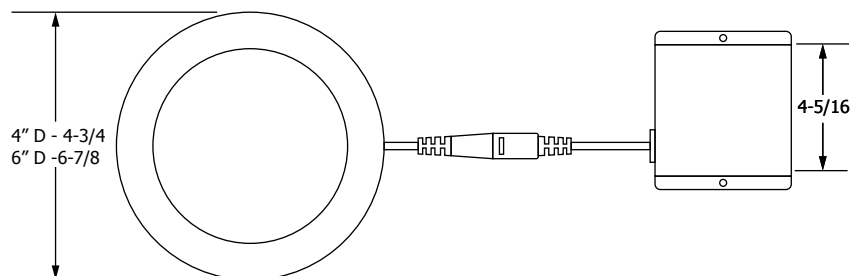

SQUARE 4" / 6"

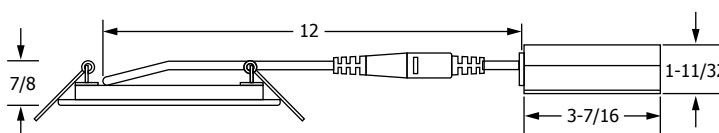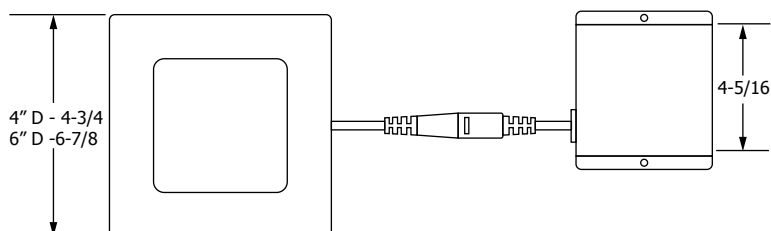

DIMMERS		
BRAND	MODEL	MAXIMUM NO. OF FIXTURES PER DIMMER
LUTRON	DVCL-153P	11
	CTCL-153P	11
	DVELV-300P	24
	SELV-300P	24
	NTELV-300	24
	NTELV-600	48
	MAELV-600	48
	MRF2-6ND-120	12
	DV600	8

DIMMERS		
BRAND	MODEL	MAXIMUM NO. OF FIXTURES PER DIMMER
LEVITON	VPE04	12
	6615	22
	VPT06	45
	VRE06	45
	6672	4
	6674	4
	IPE04	10
	6631	10
	6633-P	10
COOPER	SAL06P-W-K	10