

**LEDREADY**



PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

QTY. \_\_\_\_\_

**APPLICATIONS**

- ♦ Schools
- ♦ Offices
- ♦ Spaces utilizing video display terminals
- ♦ Locations requiring a visually comfortable environment

**INSTALLATIONS**

- ♦ Able to be cable, or stem mounted individually or in continuous rows
- ♦ Suspension mount options to suit your application; standard stem & canopies or aircraft cable

**CONSTRUCTION**

- ♦ Housing—Manufactured from code gauge steel for premium strength and rigidity
- ♦ Features durable steel bodies, quality paint finishes and superior electrical components
- ♦ Diffuser—Direct/indirect wide beam perforated diffuser for uniform ceiling illumination for a glowing, low brightness luminance
- ♦ Finish—Prior to painting, all metal parts are treated with a multi-stage phosphate bonding process to ensure adhesion and inhibit rusting. Powder coated with lighting grade white, having a reflectance factor exceeding 87% for premium quality and durability

**OVERVIEW**

- ♦ The LA603 series is a premium grade specifically designed for long-term, dependable service with the benefits of indirect lighting
- ♦ A low-profile suspended direct/indirect fixture housing for attractive glare-free ambient lighting. Micro-perforated baffle with white opal acrylic inlay combines soft down-light with even ceiling illumination. Hinged baffle.
- ♦ Available with 3 LED Tubes

**LED TUBES**

- ♦ 120-277V (50/60Hz)
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Wired for single or double end.
- ♦ Approximately 40% more energy efficient than standard F32T8 Lamps.

*Assembled with no ballast*

**LISTINGS/QUALIFICATIONS**

- ♦ Fixture Housing is ETL C/US Listed
- ♦ LED Tubes are ETL or UL C/US Listed and DLC Certified
- ♦ Proudly Made in America



### ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **LTLA603-3-T8-4-S**

<b>LTLA603</b>	<b>3</b>	<b>T8</b>			<b>AC48</b>			
SERIES	NO. OF TUBES	TYPE (LED TUBES)	TANDEM (TAN)	FIXTURE LENGTH	MOUNTING	WIRED	OPTIONS	
<b>LTLA603</b>	<b>3</b>	<b>T8</b>	-	<b>4</b>   48" Length	<b>AC48</b> Aircraft Cable	<b>S</b> Wired for Singled End		
	<b>3</b>	<b>T8</b>	<b>TAN</b>	<b>8</b>   96" Length		<b>D</b> Wired for Double End		

Emergency	
<b>EM5</b>	Emergency Battery Back Up, 500 Lumens - 1 Lamp <i>To operate, must use an electronic instant start ballast</i>
<b>EM14</b>	Emergency Battery Back Up, 1400 Lumens - 1 Lamp <i>To operate, must use an electronic instant start ballast</i>

Dimming Systems	
<b>DLT4</b>	Dimmable Systems Including driver and LED tubes (1 or 2 LED Tubes) <b>48" Length</b> (Keystone)


### TANDEM

Tandem Units, use double the number of tubes


**CONSULT FACTORY FOR WATTAGE, LUMENS AND COLOR TEMPERATURE.**

### DIMENSIONS

END VIEW

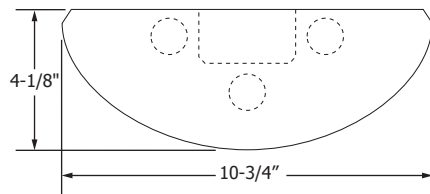

4FT.

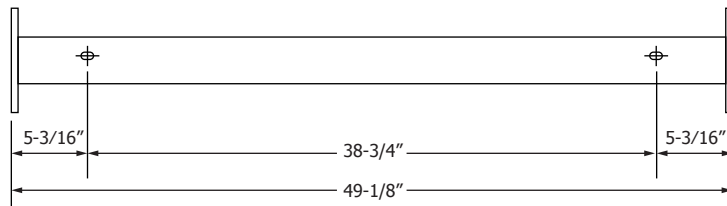

8FT.

