



PROJECT TYPE QTY.



OVERVIEW

- The LTSC107 is a staggered strip fixture.
- Ideal for conventional fluorescent replacement applications.
- Available in 2ft., 3ft., and 4ft. nominal lengths.

LED TUBES

- 120-277V (50/60Hz)
- Rated Life [L70] 50,000 Hours.
- Wired for single or double end.
- Approximately 40% more energy efficient than standard F32T8 Lamps.

Assembled with no ballast

LISTINGS/QUALIFICATIONS

- Fixture Housing is ETL C/US Listed
- LED Tubes are ETL or UL C/US Listed and DLC Certified
- Proudly Made in America





APPLICATIONS

- Coves
- Industrial Racks
- Workshops

- Retail Shelving
- Utility Areas
- Warehouses

INSTALLATION

 Suitable for individual or continuous row mounting. May be surface mounted or suspended on stems, cables, or rods.

CONSTRUCTION


- Housing—Unitized housing from heavy gauge cold rolled steel. Welded ends and socket bars. Screw-down covers easily go in or out from tight spots. Easy install snap-in sockets for fast installation. Sufficient knockouts provided on fixture back and ends. Baked enamel finish provides minimum reflectivity of 87%.
- Sockets—1/4 twist bi-pin or optional rotary locking type.



ORDERING GUIDE


Fill in the boxes below with the corresponding **bold** options.

Example: LTSC107-2-T8-4-S

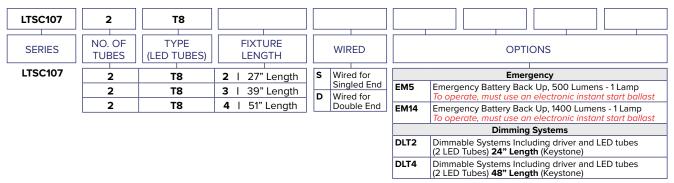


CONSULT FACTORY FOR WATTAGE, LUMENS AND COLOR TEMPERATURE.

DIMENSIONS





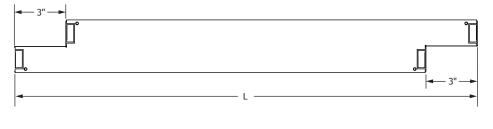

	Length	
	Nominal	Length
	2FT.	27"
	3FT.	39"
Γ	4FT.	51"

SIDE VIEW	
	1-1/2'
	<u>,</u>