

**LEDREADY**



#### OVERVIEW

- ♦ The TV305 Series is an high quality luminaire specifically designed for durable, hi-visibility areas.

#### LED TUBES

- ♦ 120-277V (50/60Hz)
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Wired for single or double end.
- ♦ Approximately 40% more energy efficient than standard F32T8 Lamps.

*Assembled with no ballast*

#### LISTINGS/QUALIFICATIONS

- ♦ Fixture Housing is ETL C/US Listed
- ♦ LED Tubes are ETL or UL C/US Listed and DLC Certified
- ♦ Proudly Made in America



PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

QTY. \_\_\_\_\_

#### APPLICATIONS

- ♦ Decorative all-purpose lensed luminaire, suitable for wall or ceiling mounting in residential, institutional or commercial applications.
- ♦ Widely used in stairwells and corridors wired with factory installed emergency battery backup.

#### INSTALLATIONS

- ♦ Able to be surface or pendant mounted individually or in continuous rows.

#### CONSTRUCTION

- ♦ Housing— Die formed from cold rolled steel for strength and uniformity. Features durable steel bodies, quality paint finishes and superior electrical components.
- ♦ Diffuser— One piece extruded clear, non-yellowing acrylic prismatic lens. Features a prismatic pattern on the bottom and linear refractive sides for brightness control and 180° uniform light. Grooved formation on the edges allows for a tight, no light leak attachment to the body. Joiner band available for continuous runs, creating a finished appearance, supplied with tandem unit.
- ♦ Ends—Die-formed for added strength. The ends hold the diffuser with positive engagement reducing vibration hazards.
- ♦ Finish—Before painting, all metal parts are treated with a multi-stage phosphate bonding process to ensure adhesion and inhibit rusting. Painted with a lighting grade baked white enamel, having a reflectance factor exceeding 87% for premium quality and durability.

### ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.


Example: **LTTV305-2-T8-4-S**

LTTV305	2	T8					
SERIES	NO. OF TUBES	TYPE (LED TUBES)	FIXTURE LENGTH	WIRED	OPTIONS		
LTTV305	2	T8	2   24" Length	S   Wired for Singled End	<b>Emergency</b> <b>EM5</b> Emergency Battery Back Up, 500 Lumens - 1 Lamp <i>To operate, must use an electronic instant start ballast</i> <b>EM14</b> Emergency Battery Back Up, 1400 Lumens - 1 Lamp <i>To operate, must use an electronic instant start ballast</i>		
	2	T8	3   36" Length	D   Wired for Double End			
	2	T8	4   48" Length				
					<b>Sensor</b>		
					<b>M1</b> Infrared Occupancy On/Off Sensor, Externally Mounted		
					<b>M3</b> Ultrasonic Occupancy On/Off Sensor Control		
					<b>M4</b> Ultrasonic Occupancy Bi-level Sensor Control		
					<b>M8</b> Infrared Occupancy Bi-Level Sensor, Externally Mounted		
					<b>Dimming Systems</b>		
					<b>DLT2</b> Dimmable Systems Including driver and LED tubes (1 or 2 LED Tubes) <b>24" Length</b> (Keystone)		
					<b>DLT4</b> Dimmable Systems Including driver and LED tubes (1 or 2 LED Tubes) <b>48" Length</b> (Keystone)		


CONSULT FACTORY FOR WATTAGE, LUMENS AND COLOR TEMPERATURE.

### DIMENSIONS

END VIEW



TOP VIEW

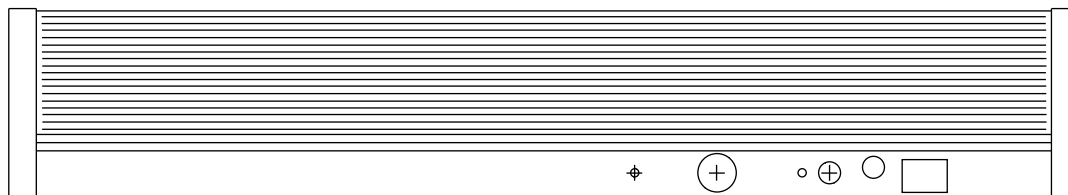

OPTIONAL MOTION SENSOR