



PROJECT
TYPE
QTY.

OVERVIEW

- ◆ Recessed flanged luminaire for installation into drywall ceilings. Heavy gauge four-sided flange mounts tight and straight against the ceiling providing a clean inconspicuous installation. A flanged troffer for use with prismatic lenses or celled louvers in concealed Z-bar ceilings.
- ◆ Four auxiliary suspension points are provided on the housing as a method of securing to the building structure as required by code.
- ◆ Available in 1'x2', 1'x4', 2'x2' and 2'x4' sizes.
- ◆ Deep cell aluminum parabolic louver (Nominal 1.5")
- ◆ Louver manufactured from low iridescent anodized aluminum.

CONSTRUCTION

- ◆ Housing—Die formed code grade heavy gauge cold rolled steel with ample strengthening embossments. End plates are securely riveted or screwed onto the housing. Removable internal ballast and wiring cover.
- ◆ Door and Diffuser—Medium cell aluminum parabolic louver / door assembly that replaces the existing fluorescent fixture door frame. It is designed to fit the standard REG803 Fixture body. Available in Semi-specular silver, specular silver and baked white enamel finish.
- ◆ Finish—White polyester powder coating applied after fabrication to all visible surfaces. Provides a durable long lasting and highly reflective finish.

APPLICATIONS

- ◆ Office Areas
- ◆ Retail Stores
- ◆ Recreation Rooms
- ◆ Hospitals

INSTALLATION

- ◆ Recessed installation into drywall ceilings with an overlapping flange trim design. Swing-out type leveling brackets have vertical adjust-ability from inside the housing. Tightening down brings the housing up tight against the ceiling.

ELECTRICAL

- ◆ All electrical components are UL or ETL Listed. Lamp holders provided ensure positive lamp retention.
- ◆ Sufficient knock-outs are provided for connections and through wiring.
- ◆ Electronic class P, thermally protected ballasts standard.
- ◆ Green ground screw installed in channel.
- ◆ All fixtures come equipped with ballast disconnect to meet NEC code 410.73.

APPROVALS

- ◆ ETL Listed. Suitable for dry and damp locations with ETL Damp Label.



ORDERING GUIDE




Fill in the boxes below with the corresponding **bold** options.

Example: **REG804-24-Z-4-32-T8-B8IN-MV-18-1.5-ASF**

REG804		Z		32		B8IN	MV		1.5	ASF
SERIES	FIXTURE SIZE	MOUNTING	NO. OF LAMPS	WATTAGE	LAMP TYPE	BALLAST TYPE	VOLTAGE	LOUVER CELLS	LOUVER DEPTH	LOUVER FINISH
REG804	T8									
14 1X4	Z	2	32	T8	B8IN	MV	8 8 CELLS	1.5 1.5"	ASF	
22 2X2	Z	2	32	U6T8	B8IN	MV	9 9 CELLS	1.5 1.5"	ASF	
24 2X4	Z	3 4	32	T8	B8IN	MV	18 18 CELLS	1.5 1.5"	ASF	

Consult Factory for additional configurations and options not listed or shown.


OPTIONS	
EM1	Emergency Battery Back Up 1 Lamp Operation
EM2	Emergency Battery Back Up 2 Lamp Operation
2C	2 Circuit
DIM	Dimming—Consult Factory

LOUVER CELLS		
1'x4' 8 CELLS 1x8	2'x2' 9 CELLS 3x3	2'x4' 18 CELLS 3x6
		


Ballast	B8IN T8, Instant Start NBF (Standard)
Voltage	MV 120-277V
Mounting	Z Flanged-In Concealed Z-Bar
Finish	ASF Aluminum Silver Finish

DIMENSIONS


2X2, 2X4 | 2 LAMPS

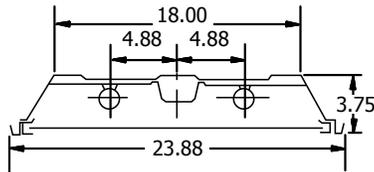


2X2, 2X4 | 3 LAMPS

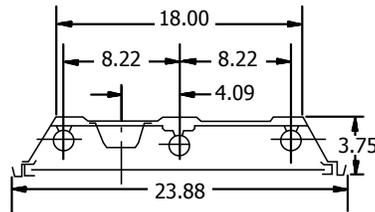


2X2, 2X4 | 4 LAMPS

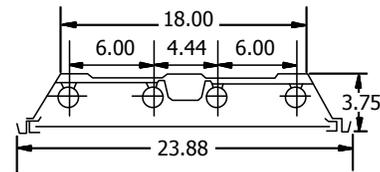

1X4 | 2 LAMPS

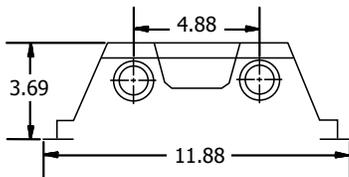

1X4 | 1 OR 3 LAMPS

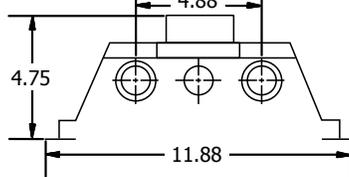

1X4 | 4 LAMPS

