



OVERVIEW

- ◆ Whether new construction or updating existing fluorescent fixtures, the REG819 recessed luminaire provides a contemporary look desired in today's commercial spaces requiring general ambient illumination.

FEATURES

- ◆ Available in 2'x2' and 2'x4' sizes.
- ◆ CRI greater than 80.
- ◆ Rated Life [L70] — 50,000 Hours.
- ◆ Fixture lumens per watt ratios [LpW] — Greater than 99.
- ◆ Class P Universal driver, 120-277V (50/60Hz)
- ◆ 0-10V Dimming

HOUSING

- ◆ Low profile body constructed from heavy-gauge cold rolled steel with white enamel finish.
- ◆ Completed with a pre-painted white polyester polymer with minimum 82% reflectivity.
- ◆ All steel component parts are protected against rust and discoloration.

LENS

- ◆ The high performance optical engine delivers main beam focus through the optically designed acrylic lens.
- ◆ The Lumieo® acrylic lens center “V” adds character to the optical assembly.

Lumieo® is a registered trademark of A.L.P. Lighting and is reprinted with permission.

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ◆ Offices
- ◆ Hospitals
- ◆ Schools
- ◆ Retail Stores
- ◆ Lobbies
- ◆ Public Areas

INSTALLATIONS

- ◆ Designed for common 15/16" T-Bar grid ceilings.
- ◆ For additional support, use the integral earthquake clips.
- ◆ Suitable for sheetrock ceilings with Flange Kit.

LED

- ◆ Linear arrayed LED modules produce a perfect combination of diffuse and effective illumination.
- ◆ Each board contains several precisely placed mid-power, high efficacy LEDs in a layout that replaces the need for supplemental heat sinking.
- ◆ The LED boards maximize optical efficiency by producing evenly diffused light.
- ◆ Dimming down to 1% on 0-10V dimming controls is standard.

WARRANTY

- ◆ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

LISTINGS/QUALIFICATIONS

- ◆ ETL C/US
- ◆ Damp Location
- ◆ IC Rated
- ◆ DLC Listed
- ◆ Proudly Made in America



ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **REG819-22-32L-35K-U-D1**

SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	OPTIONS
REG819	22 2'x2' 24 2'x4'	2x2 22L 2200 32L 3200 41L 4100 2x4 34L 3400 47L 4700 60L 6000 64L 6400 XXX XXXX Custom Lumen Package Contact Factory.	30K 3000K 35K 3500K 40K 4000K 50K 5000K	U 120-277V	D1 0-10V Dimming to 1%*	Emergency E5 Emergency Battery Back-Up, 500 Lumens E7 Emergency Battery Back-Up, 700 Lumens E10 Emergency Battery Back-Up, 1000 Lumens E13 Emergency Battery Back-Up, 1300 Lumens ER7 Remote Emergency Battery Back-Up, 700 Lumens Whips ** W1 6ft. 3 Wire Whip Tapped To 120V W2 6ft. 3 Wire Whip Tapped To 277V W3 6ft. 4 Wire Whip Tapped To 120V, Emergency W4 6ft. 4 Wire Whip Tapped To 277V, Emergency W5 6ft. 5 Wire Whip Tapped To 120V, Dimmable W6 6ft. 5 Wire Whip Tapped To 277V, Dimmable W7 6ft. 6 Wire Whip Tapped To 120V, Dimmable/Emergency W8 6ft. 6 Wire Whip Tapped To 277V, Dimmable/Emergency Mounting FK Flange Kit for Sheetrock Ceiling

*Compatible with 0-10V dimmers.


** For full details on wire whips, please visit our [accessories](http://www.ullighting.net/accessories) page at [ullighting.net](http://www.ullighting.net)

PHOTOMETRICS


Photometric reports are available at www.ullighting.net

DIMENSIONS

END VIEW

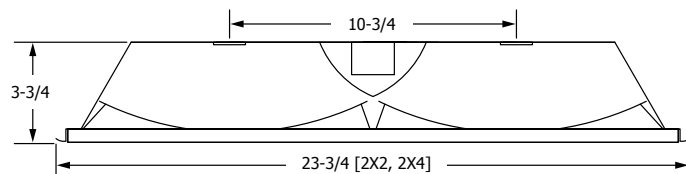

SIDE VIEW

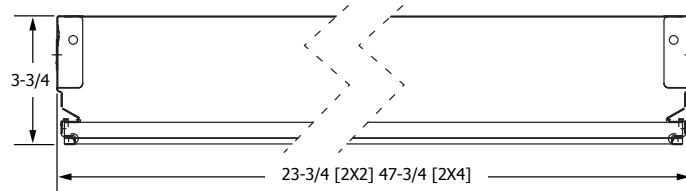

BACK VIEW

