



FEATURES

- ◆ Available with 6" trim
- ◆ Compatible with most 5/8" recessed housings
- ◆ E26 Medium base socket adapter included
- ◆ Light can be rotated 22° vertically and 355° horizontally
- ◆ CRI greater than 90
- ◆ Rated Life [L70] — 50,000 Hours
- ◆ Fixture lumens per watt ratios [LpW] — Greater than 64
- ◆ Dimmable at 120V
- ◆ Mercury Free
- ◆ 5 year limited warranty is standard

LISTINGS/QUALIFICATIONS

- ◆ UL C/US
- ◆ Suitable for Damp Locations
- ◆ Energy Star



Dimmer Compatibility


Brand	Model	Brand	Model
LEVITON	6602	LUTRON	DVCL-153P
LEVITON	6631	LUTRON	CTCL-153P
LEVITON	6633	LUTRON	S-600
LEVITON	6674	LUTRON	S-600P
LEVITON	6681		
LEVITON	6683		
LEVITON	IPL06		

ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **RB-6R-10L-30K-1-D3**

RG	6R	10L		1	D3
SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING
RG	6R 6" Round	6N.	30K 3000K 40K 4000K	1 120V	D3 Dimmable 120V
		10L 1050			

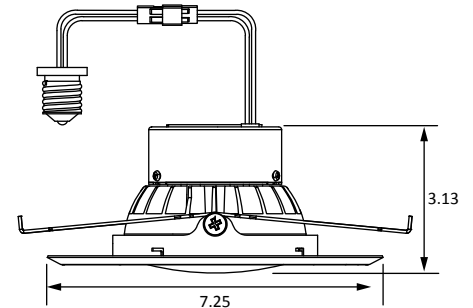

Lumen Packages

Item No.	Oder Code	Size	Nominal Lumens	Delivered Lumens	Color Temp.	Watts	LpW	Dimmable	UL	Energy Star
RG6R1030	RG-6R-10L-30K-1-D3	6"	1050	1025	3000K	12W	85	120V	✓	✓
RG6R1040	RG-6R-10L-40K-1-D3	6"	1050	1100	4000K	12W	92	120V	✓	✓

- This unit is designed to be compatible with most leading edge or incandescent style rotary or slide type dimmers. (Dimming range 100% - 5%) Fixture performance may vary depending on dimmer manufacturer and circuit loading.
- Avoid mixing load types on the same circuit: Do not dim LED while also dimming CFL or incandescent loads.