



PROJECT _____

TYPE _____

QTY. _____

Asymmetrical



Symmetrical



OVERVIEW

- ♦ **T8**—A low profile, narrow fluorescent open lamp strip. Smallest possible design offered with integral T8 ballast. Allows the lighting professional greater design freedom. 1 Lamp
- ♦ **T5**—Miniature profile linear fluorescent open lamp strip luminaire designed for either standard T5 or T5-HO lamp and ballast technologies. Side mounted lamps on either one side or both sides for applications requiring shallow depth and unique designs. 1 Lamp
- ♦ Available in numerous different lengths

CONSTRUCTION

- ♦ Housing—Unitized housing from heavy gauge cold rolled steel. Welded ends and socket bars. Screw-down covers easily go in or out from tight spots. Easy install snap-in sockets for fast installation. Sufficient knockouts provided on fixture back and ends. Baked enamel finish provides minimum reflectivity of 87%.
- ♦ Sockets—¼ twist bi-pin or optional rotary locking type.
- ♦ Reflectors—For shielding and directional light patterns; Asymmetric and symmetric. White enamel finish or optional enhanced specular aluminum which has a 95% reflectivity. Custom shapes available.

APPLICATIONS

- ♦ Commercial
- ♦ Industrial
- ♦ Retail
- ♦ Residential General Areas
- ♦ Indirect and Direct Cove/Valance Lighting Areas

INSTALLATION

- ♦ Designed for surface, stem or chain hanging, mounted individually or in continuous row.

ELECTRICAL

- ♦ All electrical components are UL or ETL Listed. Lamp holders provided ensure positive lamp retention.
- ♦ Sufficient knock-outs are provided for connections and through wiring.
- ♦ Electronic class P, thermally protected ballasts standard.
- ♦ Green ground screw installed in channel.
- ♦ All fixtures come equipped with ballast disconnect to meet NEC code 410.73.

APPROVALS

- ♦ ETL Listed. Suitable for dry and damp locations with ETL Damp Label.



ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.


Example: **SC104-4-1-32-T8-B8RN-1**

SC104		1				1				
SERIES	FIXTURE LENGTH	NO. OF LAMPS	WATTAGE	LAMP TYPE	BALLAST TYPE	VOLTAGE	OPTIONS			
SC104	T8						EM1	Emergency Battery Back Up—1 Lamp Operation		
	2 2FT.	1	17	T8	B8RN	1	MS	Motion Sensor		
	3 3FT.	1	25	T8	B8RN	1	DIM	Dimming—Consult Factory		
	4 4FT.	1	32	T8	B8RN	1	Accessories			
	T5 / T5HO						SS	Stem Set		
	2 2FT.	1	14	T5	B5R	1	CS	Cable Set		
	3 3FT.	1	21	T5	B5R	1	Reflectors			
	4 4FT.	1	28	T5	B5R	1	A	Asymmetrical		
	5 5FT.	1	35	T5	B5R	1	S	Symmetrical		
	2 2FT.	1	24	T5HO	B5HOR	1	Mounting (T5 Configurations)			
	3 3FT.	1	39	T5HO	B5HOR	1	SM	Side Mount (Special Order)		
	4 4FT.	1	54	T5HO	B5HOR	1	RM	Right Angle Mount (Special Order)		
							Ballast			
						B8RN	T8, Rapid Start NBF (120V)			
						B5R	T5, Rapid Start			
						B5HOR	T5 HO, Rapid Start			
						Voltage				
						1	120V			

Consult Factory for additional configurations and options not listed or shown.

8FT. Configuration is available as a special order. Consult factory.

DIMENSIONS

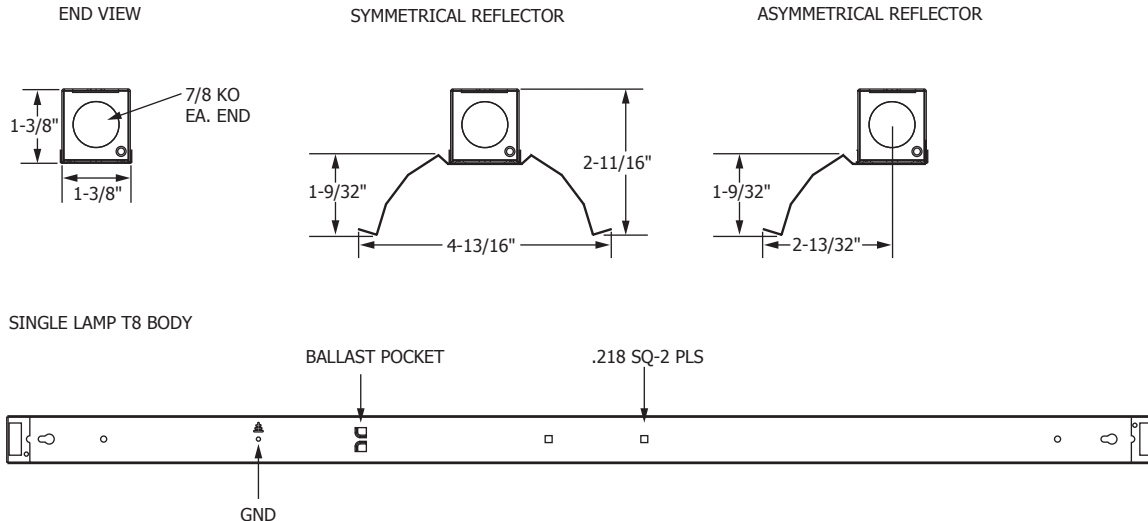

Dimensions (in.)		
Type		Length
T5	14W	22"
T5	21W	34"
T5	28W	46"
T5	35W	58"
T5HO	24W	22"
T5HO	39W	34"
T5HO	54W	46"
T8	17W	24"
T8	25W	36"
T8	32W	48"