



PROJECT _____

TYPE _____

QTY. _____



OVERVIEW

- ♦ The SC107 is a staggered strip fixture.
- ♦ Available in 2ft., 3ft., and 4ft. nominal lengths.

CONSTRUCTION

- ♦ Housing—Unitized housing from heavy gauge cold rolled steel. Welded ends and socket bars. Screw-down covers easily go in or out from tight spots. Easy install snap-in sockets for fast installation. Sufficient knockouts provided on fixture back and ends. Baked enamel finish provides minimum reflectivity of 87%.
- ♦ Sockets—¼ twist bi-pin or optional rotary locking type.

APPLICATIONS

- ♦ Coves
- ♦ Store Fixture
- ♦ Display

INSTALLATION

- ♦ Designed for surface, stem or chain hanging, mounted individually or in continuous row.

ELECTRICAL

- ♦ All electrical components are UL or ETL Listed. Lamp holders provided ensure positive lamp retention.
- ♦ Sufficient knock-outs are provided for connections and through wiring.
- ♦ Electronic class P, thermally protected ballasts standard.
- ♦ Green ground screw installed in channel.
- ♦ All fixtures come equipped with ballast disconnect to meet NEC code 410.73.

APPROVALS

- ♦ ETL Listed. Suitable for dry and damp locations with ETL Damp Label.



ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **SC107-4-2-32-T8-B8IN-MV**


SC107		2				MV	
SERIES	FIXTURE LENGTH	NO. OF LAMPS	WATTAGE	LAMP TYPE	BALLAST TYPE	VOLTAGE	OPTIONS
SC107	T8						EM1 Emergency Battery Back Up, 1 Lamp Operation
	2 2FT.	2	17	T8	B8IN	MV	
	3 3FT.	2	25	T8	B8IN	MV	
	4 4FT.	2	32	T8	B8IN	MV	Ballast B8IN T8, Instant Start B5P T5, Program Start B5HOP T5 HO, Program Start Voltage MV 120-277V
	T5 / T5HO						
	2 2FT.	2	14	T5	B5P	MV	
	3 3FT.	2	21	T5	B5P	MV	
	4 4FT.	2	28	T5	B5P	MV	
	2 2FT.	2	24	T5HO	B5HOP	MV	
	3 3FT.	2	39	T5HO	B5HOP	MV	
	4 4FT.	2	54	T5HO	B5HOP	MV	

Consult Factory for additional configurations and options not listed or shown.


8FT. Configuration is available as a special order. Consult factory.

DIMENSIONS


END VIEW

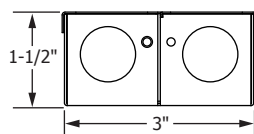

TOP VIEW

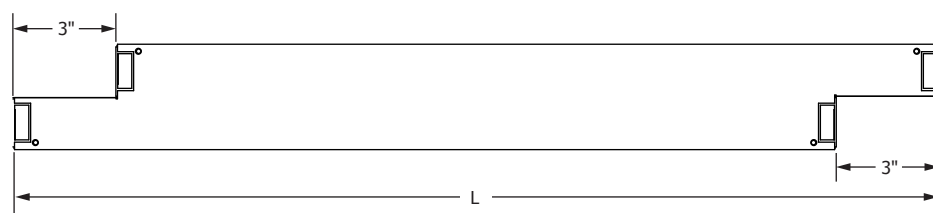

SIDE VIEW

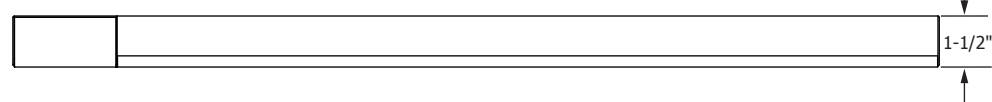

Length

Type	Length
T5/T5HO 2FT.	25-7/16"
T5/T5HO 3FT.	37-9/32"
T5/T5HO 4FT.	49-1/16"
T8 2FT.	27"
T8 3FT.	39"
T8 4FT.	51"