




PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

QTY. \_\_\_\_\_

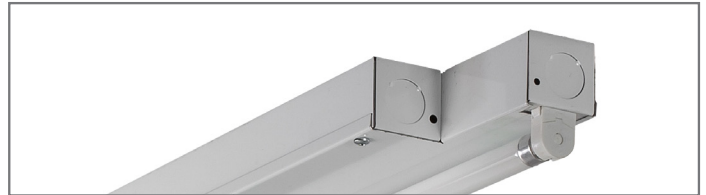

### OVERVIEW

- ♦ The SC108 is a staggered strip fixture.
- ♦ Available in 2ft., 3ft., and 4ft. nominal lengths.

### CONSTRUCTION

- ♦ Housing—Unitized housing from heavy gauge cold rolled steel. Welded ends and socket bars. Screw-down covers easily go in or out from tight spots. Easy install snap-in sockets for fast installation. Sufficient knockouts provided on fixture back and ends. Baked enamel finish provides minimum reflectivity of 87%.
- ♦ Sockets—¼ twist bi-pin or optional rotary locking type.

### APPLICATIONS

- ♦ Coves
- ♦ Store Fixture
- ♦ Display

### INSTALLATION

- ♦ Designed for surface, stem or chain hanging, mounted individually or in continuous row.

### ELECTRICAL

- ♦ All electrical components are UL or ETL Listed. Lamp holders provided ensure positive lamp retention.
- ♦ Sufficient knock-outs are provided for connections and through wiring.
- ♦ Electronic class P, thermally protected ballasts standard.
- ♦ Green ground screw installed in channel.
- ♦ All fixtures come equipped with ballast disconnect to meet NEC code 410.73.

### APPROVALS

- ♦ ETL Listed. Suitable for dry and damp locations with ETL Damp Label.



### ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **SC108-4-1-32-T8-B8IN-MV**


SC108		1					
SERIES	FIXTURE LENGTH	NO. OF LAMPS	WATTAGE	LAMP TYPE	BALLAST TYPE	VOLTAGE	OPTIONS
SC108	T8						EM1 Emergency Battery Back Up, 1 Lamp Operation
	2   2FT.	1	17	T8	B8IN	MV	
	3   3FT.	1	25	T8	B8IN	MV	
	4   4FT.	1	32	T8	B8IN	MV	
	T5 / T5HO						<b>Ballast</b> <b>B8IN</b> T8, Instant Start NBF (Standard) <b>B5R</b> T5, Rapid Start <b>B5HOR</b> T5 HO, Rapid Start <b>Voltage</b> <b>MV</b> 120-277V <b>1</b> 120V
	2   2FT.	1	14	T5	B5R	1	
	3   3FT.	1	21	T5	B5R	1	
	4   4FT.	1	28	T5	B5R	1	
	2   2FT.	1	24	T5HO	B5HOR	1	
	3   3FT.	1	39	T5HO	B5HOR	1	
	4   4FT.	1	54	T5HO	B5HOR	1	

Consult Factory for additional configurations and options not listed or shown.


8FT. Configuration is available as a special order. Consult factory.

### DIMENSIONS


END VIEW

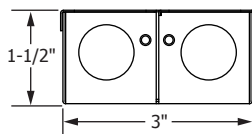

TOP VIEW

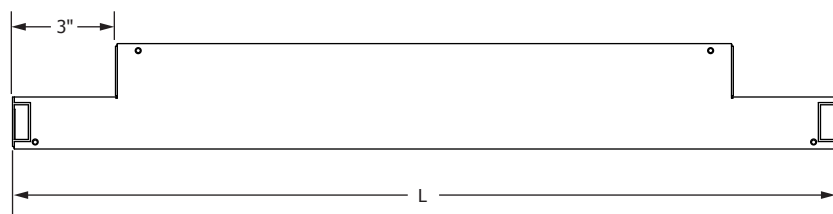

SIDE VIEW



#### Length

Type	Length
T5/T5HO 2FT.	22-7/16"
T5/T5HO 3FT.	34-9/32"
T5/T5HO 4FT.	46-1/16"
T8 2FT.	24"
T8 3FT.	36"
T8 4FT.	48"