

OVERVIEW

- ♦ The SM712, having the appearance of a traditional fluorescent fixture, provides a contemporary look to today's commercial spaces by offering interest and depth across the ceiling plane.

FEATURES

- ♦ Available in 1'x4', 2'x2' and 2'x4' sizes.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 99.
- ♦ Class P Universal driver, 120-277V (50/60Hz)
- ♦ 0-10V Dimming

HOUSING

- ♦ Low profile body constructed from 23-gauge cold rolled steel.
- ♦ Completed with a white polyester polymer finish.
- ♦ All steel component parts are protected against rust and discoloration.

LENS

- ♦ The high performance optical engine delivers main beam focus through the integrated acrylic lens.
- ♦ The Lumieo® acrylic lens center "V" adds character to the optical assembly.

Lumieo® is a registered trademark of A.L.P. Lighting and is reprinted with permission.

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ♦ Offices
- ♦ Classrooms
- ♦ Hospitals
- ♦ Retail Stores

INSTALLATIONS

- ♦ Designed for common direct surface mount ceilings.
- ♦ For additional support, use blind pre-punched knockouts.
- ♦ Suitable for pendant mount applications with stem kit.

LED

- ♦ Linear arrayed LED modules produce a perfect combination of diffuse and effective illumination.
- ♦ Each board contains several precisely placed mid-power, high efficacy LEDs in a layout that replaces the need for supplemental heat sinking.
- ♦ The LED boards maximize optical efficiency by producing evenly diffused light.
- ♦ Dimming down to 1% on 0-10V dimming controls is standard.

WARRANTY

- ♦ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

LISTINGS/QUALIFICATIONS

- ♦ ETL C/US
- ♦ Damp Location
- ♦ DLC Listed
- ♦ Proudly Made in America



ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **SM712-22-32L-35K-U-D1**

SM712				U	D1		
SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	OPTIONS	
SM712	14	1'x4'				Emergency	
	22	2'x2'	34L	30K	3000K	E5	Emergency Battery Back-Up, 500 Lumens
	24	2'x4'	47L	35K	3500K	E7	Emergency Battery Back-Up, 700 Lumens
			60L	40K	4000K	E10	Emergency Battery Back-Up, 1000 Lumens
			64L	50K	5000K	E13	Emergency Battery Back-Up, 1300 Lumens
						Mounting	
						Surface Mount is Standard	
						SK	Stem Kit


**Compatible with 0-10V dimmers.*

PHOTOMETRICS

Photometric reports are available at www.ullighting.net

DIMENSIONS

END VIEWS

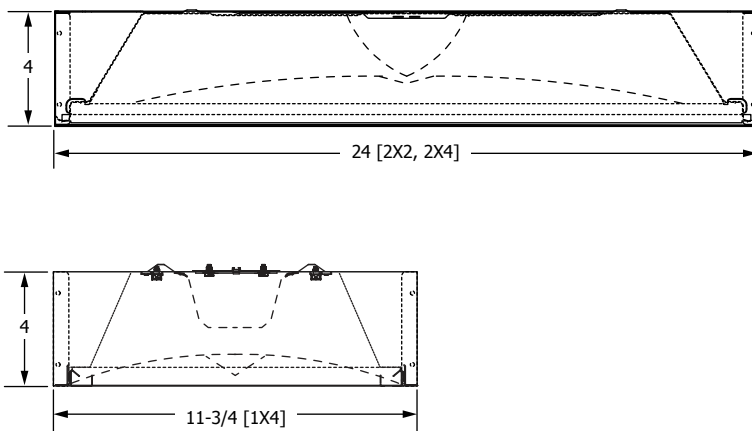

BACK VIEW

