


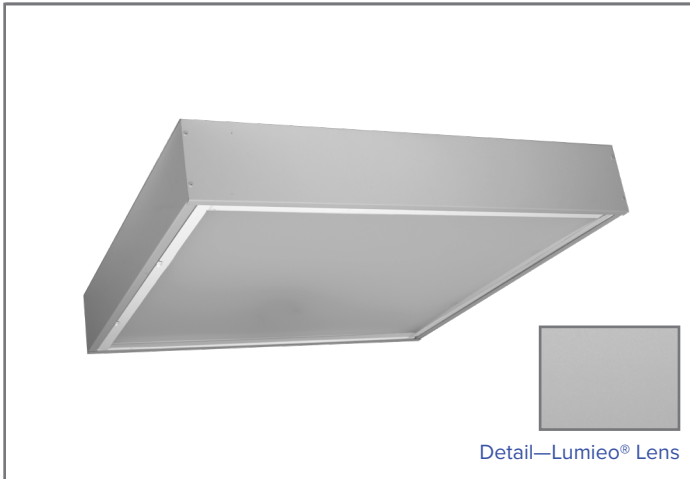

OVERVIEW

- ♦ The SM714, having the appearance of a traditional fluorescent fixture, provides a contemporary look to today's commercial spaces by offering interest and depth across the ceiling plane.

FEATURES

- ♦ Available in 1'x4', 2'x2' and 2'x4' sizes.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 99.
- ♦ Class P Universal driver, 120-277V (50/60Hz)
- ♦ 0-10V Dimming

HOUSING

- ♦ Low profile body constructed from 23-gauge cold rolled steel.
- ♦ Completed with a white polyester polymer finish.
- ♦ All steel component parts are protected against rust and discoloration.

LENS

- ♦ The high performance optical engine delivers main beam focus through the integrated polymeric lens.
- ♦ The Lumieo® lens provides an optimum look with LED performance.

Lumieo® is a registered trademark of A.L.P. Lighting and is reprinted with permission.

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ♦ Offices
- ♦ Classrooms
- ♦ Hospitals
- ♦ Retail Stores

INSTALLATIONS

- ♦ Designed for common direct surface mount ceilings.
- ♦ For additional support, use blind pre-punched knockouts.
- ♦ Suitable for pendant mount applications with stem kit.

LED

- ♦ Linear arrayed LED modules produce a perfect combination of diffuse and effective illumination.
- ♦ Each board contains several precisely placed mid-power, high efficacy LEDs in a layout that replaces the need for supplemental heat sinking.
- ♦ The LED boards maximize optical efficiency by producing evenly diffused light.
- ♦ Dimming down to 1% on 0-10V dimming controls is standard.

WARRANTY

- ♦ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

LISTINGS/QUALIFICATIONS

- ♦ ETL C/US
- ♦ Damp Location
- ♦ Proudly Made in America



ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **SM714-22-32L-35K-U-D1**

SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	OPTIONS
SM714				U	D1	
SM714	14 1'x4' 22 2'x2' 24 2'x4'	1x4 34L 3400 47L 4700 60L 6000 64L 6400 2x2 22L 2200 32L 3200 41L 4100 2x4 34L 3400 47L 4700 60L 6000 64L 6400 XXX XXXX Custom Lumen Package Contact Factory.	30K 3000K 35K 3500K 40K 4000K 50K 5000K	U 120-277V	D1 0-10V Dimming to 1%*	Emergency E5 Emergency Battery Back-Up, 500 Lumens E7 Emergency Battery Back-Up, 700 Lumens E10 Emergency Battery Back-Up, 1000 Lumens E13 Emergency Battery Back-Up, 1300 Lumens Mounting <i>Surface Mount is Standard</i> SK Stem Kit


*Compatible with 0-10V dimmers.

PHOTOMETRICS

Photometric reports are available at www.ullighting.net

DIMENSIONS

END VIEWS

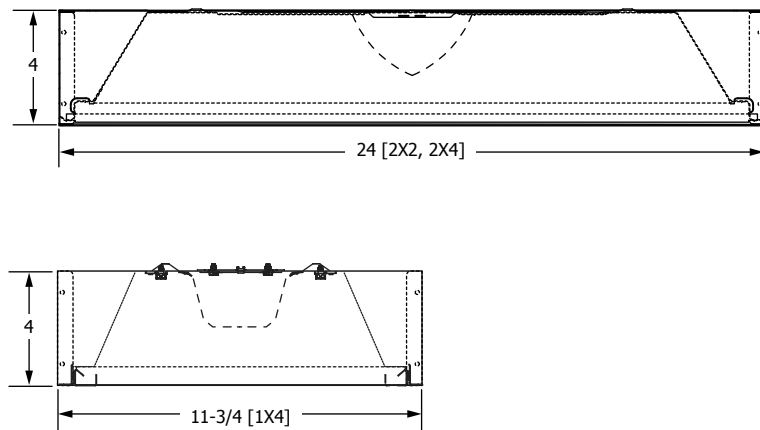

BACK VIEW

