

### OVERVIEW

- ♦ The SM715, having the appearance of a traditional fluorescent fixture, provides a contemporary look to today's commercial spaces by offering interest and depth across the ceiling plane.

### FEATURES

- ♦ Available in 1'x4', 2'x2' and 2'x4' sizes.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 99.
- ♦ Class P Universal driver, 120-277V (50/60Hz)
- ♦ 0-10V Dimming

### HOUSING

- ♦ Low profile body constructed from 23-gauge cold rolled steel.
- ♦ Completed with a white polyester polymer finish.
- ♦ All steel component parts are protected against rust and discoloration.

### LENS

- ♦ Lumieo® acrylic thermoformed lens with a ribbed, detailed center.
- ♦ High light transmission with pixelation hiding properties.

Lumieo® is a registered trademark of A.L.P. Lighting and is reprinted with permission.

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

QTY. \_\_\_\_\_

### APPLICATIONS

- ♦ Offices
- ♦ Classrooms
- ♦ Hospitals
- ♦ Retail Stores

### INSTALLATIONS

- ♦ Designed for common direct surface mount ceilings.
- ♦ For additional support, use blind pre-punched knockouts.
- ♦ Suitable for pendant mount applications with stem kit.

### LED

- ♦ Linear arrayed LED modules produce a perfect combination of diffuse and effective illumination.
- ♦ Each board contains several precisely placed mid-power, high efficacy LEDs in a layout that replaces the need for supplemental heat sinking.
- ♦ The LED boards maximize optical efficiency by producing evenly diffused light.
- ♦ Dimming down to 1% on 0-10V dimming controls is standard.

### WARRANTY

- ♦ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

### LISTINGS/QUALIFICATIONS

- ♦ ETL C/US
- ♦ Damp Location
- ♦ DLC Listed
- ♦ Proudly Made in America



### ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **SM715-22-32L-35K-U-D1**

SM715				U	D1		
SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	OPTIONS	
<b>SM715</b>	<b>14</b> 1'x4'	<b>1x4</b>	<b>30K</b> 3000K	<b>U</b> 120-277V	<b>D1</b> 0-10V Dimming to 1%*	<b>Emergency</b>	
	<b>22</b> 2'x2'	<b>34L</b> 3400	<b>35K</b> 3500K			<b>E5</b>	Emergency Battery Back-Up, 500 Lumens
	<b>24</b> 2'x4'	<b>47L</b> 4700	<b>40K</b> 4000K			<b>E7</b>	Emergency Battery Back-Up, 700 Lumens
		<b>60L</b> 6000	<b>50K</b> 5000K			<b>E10</b>	Emergency Battery Back-Up, 1000 Lumens
		<b>64L</b> 6400				<b>E13</b>	Emergency Battery Back-Up, 1300 Lumens
		<b>2x2</b>				<b>Mounting</b>	
		<b>22L</b> 2200				Surface Mount is Standard	
		<b>32L</b> 3200					
		<b>41L</b> 4100					
		<b>2x4</b>					
		<b>34L</b> 3400					
		<b>47L</b> 4700					
		<b>60L</b> 6000					
		<b>64L</b> 6400					
		<b>XXX</b> XXXX					
		Custom Lumen Package Contact Factory.					


\*Compatible with 0-10V dimmers.

### PHOTOMETRICS

Photometric reports are available at [www.ullighting.net](http://www.ullighting.net)

### DIMENSIONS

END VIEWS

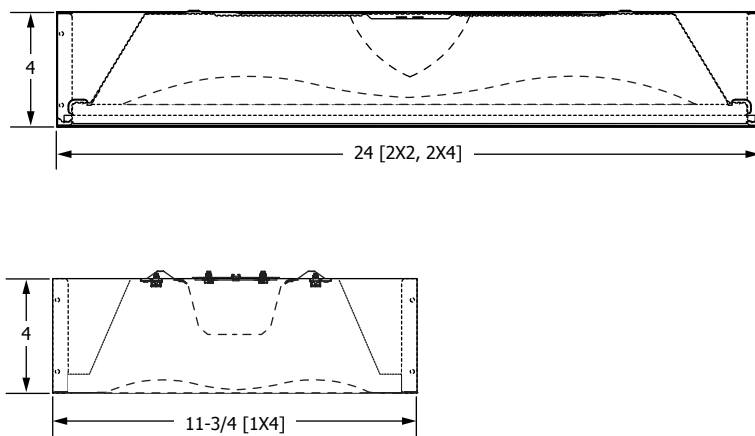

BACK VIEW

