

OVERVIEW

- ♦ The TV319 provides a decorative appearance to any wall application with its square profile and ribbed, white acrylic diffuser.

FEATURES

- ♦ Available in 2ft. and 4ft. sizes.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 100.
- ♦ Class P Universal driver, 120-277V (50/60Hz)
- ♦ 0-10V Dimming
- ♦ Ultrasonic Occupancy Motion Sensors

HOUSING

- ♦ Constructed from heavy-gauge cold rolled steel.
- ♦ Completed with a baked white finish with high reflectivity.*
- ♦ Electrical knockouts are provided on the housing back and ends.

LENS

- ♦ Extruded ribbed white acrylic lens. May be removed through the end caps.

*Other colors available. Consult factory.

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ♦ Vanities

INSTALLATIONS

- ♦ Designed for surface mount on walls.
- ♦ Mount individually in any direction.
- ♦ Suitable for ceiling surface mount.

LED

- ♦ Small-scale diffuser evenly surrounds the LED light source.
- ♦ Linear arrayed LED modules produce a perfect combination of diffuse and effective illumination.
- ♦ Each board contains several precisely placed mid-power, high efficacy LEDs in a layout that replaces the need for supplemental heat sinking.
- ♦ The LED boards maximize optical efficiency by producing evenly diffused light.
- ♦ Dimming down to 1% on 0-10V dimming controls is standard.

WARRANTY

- ♦ 5 year limited warranty is standard.
Exclusions may apply. Contact factory for terms and conditions.

LISTINGS/QUALIFICATIONS

- ♦ ETL C/US
- ♦ Damp Location
- ♦ Proudly Made in America



ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **TV319-4-32L-40K-U-D1**

TV319				U	D1			
SERIES	FIXTURE LENGTH	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	OPTIONS		
TV319	2 2FT. 4 4FT.	2FT. 10L 1000 13L 1300 19L 1900 27L 2700 4FT. 22L 2200 32L 3200 41L 4100	30K 3000K 35K 3500K 40K 4000K 50K 5000K	U 120-277V	D1 0-10V Dimming to 1%*	Emergency E5 Emergency Battery Back-Up, 500 Lumens E7 Emergency Battery Back-Up, 700 Lumens E10 Emergency Battery Back-Up, 1000 Lumens E13 Emergency Battery Back-Up, 1300 Lumens Sensor M1 Infrared Occupancy On/Off Sensor <i>Externally Mounted</i> M3 Ultrasonic Occupancy On/Off Sensor Control M4 Ultrasonic Occupancy Bi-level Sensor Control M8 Infrared Occupancy Bi-level Sensor <i>Externally Mounted</i>		


*Compatible with 0-10V dimmers.

PHOTOMETRICS

Photometric reports are available at www.ullighting.net

DIMENSIONS

END VIEWS

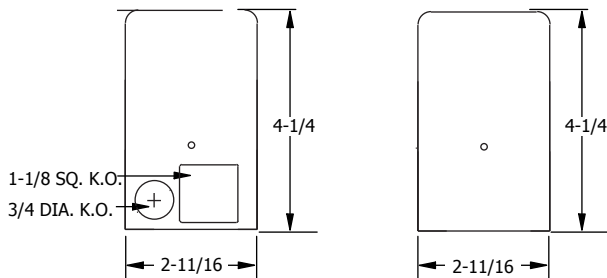

FIXTURE SIZE			
Nominal Size	Length (L)	Width (W)	Height (H)
2FT.	24-1/4	2-5/8	4-1/4
4FT.	48-1/4	2-5/8	4-1/4