

APPLIES TO MODELS: VT417-4

GENERAL SAFETY INFORMATION

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general
 precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- DO NOT INSTALL DAMAGED PRODUCT!
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- Suitable for Dry or Damp locations

WARNING: RISK OF ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

CAUTION: RISK OF FIRE

- Keep combustible and other materials that can burn away from luminaire and lamp/lens.
- MIN 90°C SUPPLY CONDUCTORS.

SAVE THESE INSTRUCTIONS

Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer. Each luminaire is to be used with inside driver kit. Wiring to be performed by qualified electrician only.


U.L. Lighting Fixtures Corp.

SURFACE INSTALLATION APPLIES TO MODELS


Always turn off the power supply from main circuit breaker first!

VT417-4

- **Step 1:** Locate drill holes for mounting brackets. Use hardware found in hardware kit. Mount bracket to surface.
- Step 2: Pre-attached lens buckles to housing and Detach LED tray from fixture.
- Step 3: Attach body to mounting clips.
- Step 4: Locate safety cable when opening to install fixture body and Snap connect tether to gear tray before making electrical connection as shown in figure B.
- Step 5: Connect power to driver through outlet box(Figure C), make sure to snap the cover to the outlet box after the wiring. Follow general wiring Diagram on Figure A for reference. Make sure the power supply is disconnected before installing.
- **Step 6:** Re-attach LED tray to fixture by reversing step 2.
- Step 7: Install lens by using the buckles provided in hardware kit to secure attach lens to body fixture.
- Step 8: Restore power.

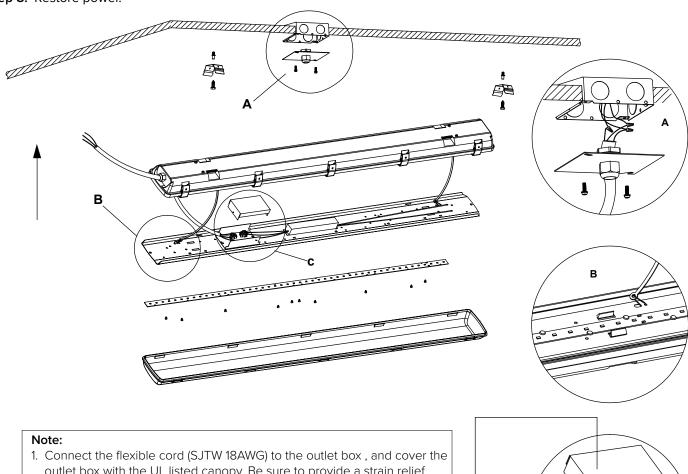

- outlet box with the UL listed canopy. Be sure to provide a strain relief means at the canopy side
- 2. To ensure that the gap is sealed by glue.
- 3. Be sure to provide with a wet location rated strain relief means

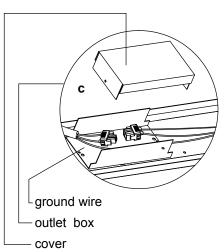

www.ullighting.net | 718.726.7500