



OVERVIEW

- ♦ The VT417 is an enclosed and gasketed linear luminaire designed to withstand a variety of environmental conditions. This fixture is weather resistant, corrosion free, and are resistant to vapors, dust, and moisture.

FEATURES

- ♦ Available in 4ft. nominal length.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 126.
- ♦ 120-277V (50/60Hz)
- ♦ 0-10V Dimming.

HOUSING

- ♦ 100% UV stabilized polycarbonate housing, liquid silicone perimeter gasket. Completed with an enduring gray color that never needs refinishing. Available with one 7/8" conduit entry on either or both ends.
- ♦ The continuous poured gasketing fills the perimeter securing the diffuser to the housing, consistently maintaining a strong seal.

LENS

- ♦ 100% UV stabilized polycarbonate lens eliminated glare and is integrated with crystals that enhance even light distribution.

LATCHES

- ♦ A set of self-locking gray polycarbonate latches firmly hold the diffuser to the housing without the use of additional hardware.

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ♦ Parking Garages
- ♦ Refrigerated Storage
- ♦ Commercial Kitchens
- ♦ Industrial Facilities
- ♦ Car Washes
- ♦ Workshops

INSTALLATIONS

- ♦ Designed for ceiling surface mount applications.
- ♦ For additional support, use stainless steel strap brackets.
- ♦ Suitable for pendant mount.

LED

- ♦ Each board contains several precisely placed mid-power, high efficacy LEDs in a layout that replaces the need for supplemental heat sinking.
- ♦ The LED boards maximize optical efficiency by producing evenly diffused light.
- ♦ Dimming down to 10% on 0-10V dimming controls.

WARRANTY

- ♦ 5 year limited warranty is standard.
Exclusions may apply. Contact factory for terms and conditions

ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **VT417-4-66L-40K-U-D2**

VT417	4			U	D2			
SERIES	FIXTURE LENGTH	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	OPTIONS		
VT417	4 4FT.	4FT.	35K 3500K** 40K 4000K (Std) 50K 5000K	U 120-277V	D2 0-10V Dimming to 10%*	Emergency E5 Emergency Battery Back-Up, 500 Lumens E7 Emergency Battery Back-Up, 700 Lumens E10 Emergency Battery Back-Up, 1000 Lumens E13 Emergency Battery Back-Up, 1300 Lumens Sensor M7 Infrared Occupancy On/Off Sensor, Weather Proof - Externally Mounted Brackets B1 Stainless Steel Strap Brackets (Set of 2)		
		44L 4400 50L 5000 66L 6600						

* Compatible with 0-10V dimmers.

** Special order - consult factory.


4FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
4400	3500K	35W	4244	126	✓
	4000K		4550	130	✓
	5000K		4585	131	✓
5000	3500K	40W	4793	126	✓
	4000K		5200	130	✓
	5000K		5240	131	✓
6600	3500K	52W	6469	126	✓
	4000K		6760	130	✓
	5000K		6812	131	✓

PHOTOMETRICS

Photometric reports are available at www.ullighting.net

DIMENSIONS

END VIEW

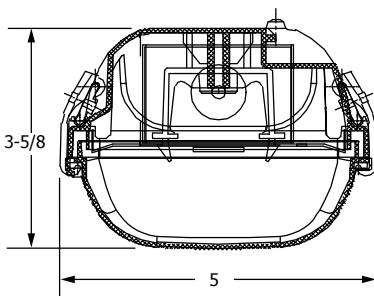

BACK VIEW

